


Structure

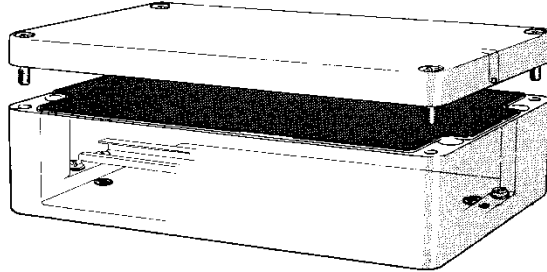

Box material GRP

Glassfibre-reinforced polyester

Colour	: grey, similar RAL 7000
Protection type	: IP 66, EN 50014
Temperature range	: -40...+90°C
Impact resistance	: >7 Nm, EN 50014

Standard enclosures. Lid and base fastened by captive lid screws in stainless steel (plus/minus screw head).

Type designation

- The boxes are equipped with terminals of your choice.
- All boxes are available in Ex-version.
- Installation inside with thermostats, glands etc. is documented in the connecting scheme by ordering.

Standard types

EK 110 / RK 110	length/width/hight	75mm/110mm/55mm
EK 120 / RK 120	length/width/hight	122mm/120mm/90mm
EK 160 / RK 160	length/width/hight	160mm/160mm/90mm
EK 260 / RK 260	length/width/hight	260mm/160mm/90mm
EK 360 / RK 360	length/width/hight	360mm/160mm/90mm
(other dimensions on request)		